


LUNAPRESS®

CP-1000SL
CP-1200SL

氣壓全自動連續式粘襯機


STRAIGHT LINEAR FUSING PRESS

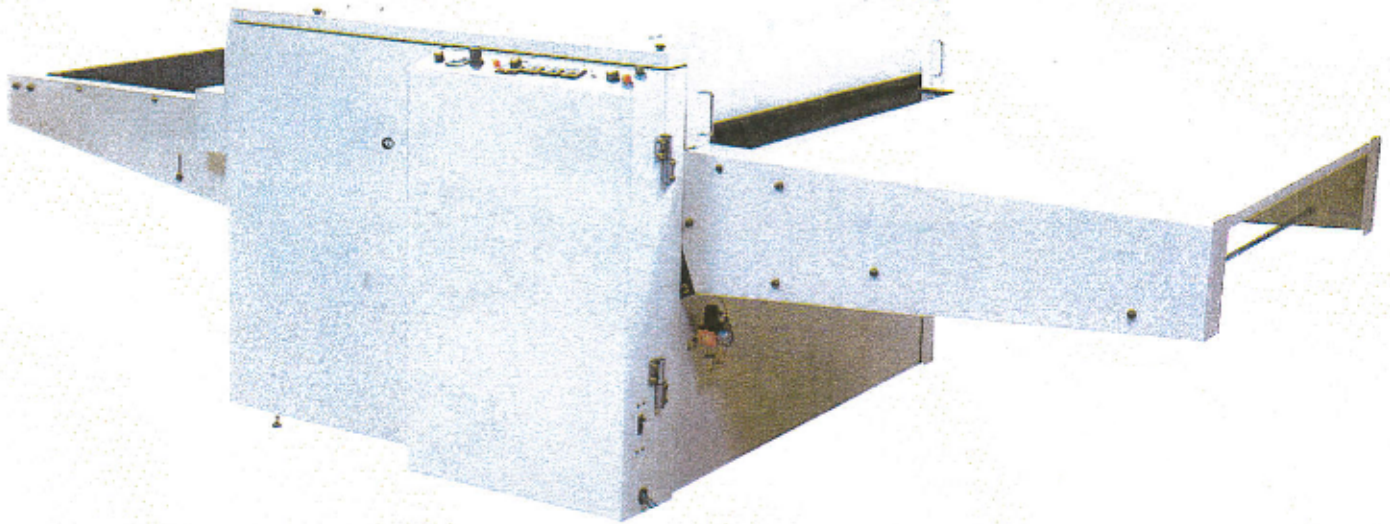

Features

- Continuous fusing system thus increases productivity and unlimited working length.
- Automatic tracking adjustment device prevents upper and lower belts from snaking and always keeps the belts right in the center position.
- Dual thermostats and non contact Solid State Relay (S.S.R.) minimizes the temperature difference, reduces the noise and trouble shooting considerably.
- The heats range in 9 sets. Each differs from three levels: front, middle and rear. Flexible adjustment in temperature, the heater is fit for all kinds of yarns and interlinings.
- Anti-puckering silicon rubberized rollers are precisely controlled by air cylinder so that any different fabrics or interlinings can be perfectly fused and sandwich fusing is also possible.
- Special alumite treated heating elements assure long service life and the heating-up period is short to reach 180°C.
- Easy to operate. Little maintenance.
- The change of belts can be done in a short time.

Design 結構圖

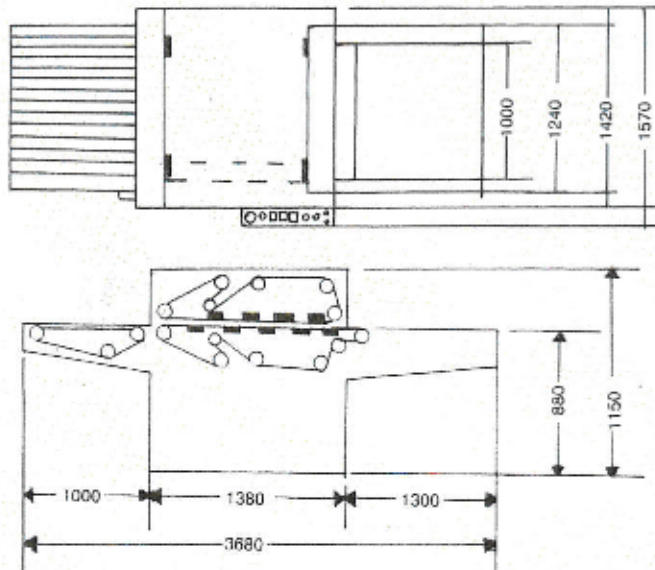

特長

- 連續式設備，提高生產量，且裁片長度不受限制。
- 採用自動蛇行修正裝置，上下皮帶經常保持固定位置。
- 採用雙重電子溫度控制和無接點斷電器(SSR)或電磁開關，故溫差減至最低程度並大大減少電子故障率及噪音。故可適應任何不同。
- 九組電熱器可前、中、後三段式溫度控制調整，故可適用各種布料及內襯。
- 特殊防塵沙膠滾筒，經由空壓調整，不但可適用各種布料並可內外雙層粘襯。
- 特殊鋁合金(Alumite)製成的電熱管，經久耐用且在最短時間內可加熱至180°C。
- 操作容易，維護簡單，更換皮帶簡易。

Specifications	規格	
Model 型號	CP-1000SL	CP-1200SL
Motor 馬達	200W	200W
Max. Temperature 最高溫度	200°C	200°C
Heater 電熱	16.5KW (9PCS)	18KW (9PCS)
Max. Pressure 最大壓力	5kgs/cm ²	5kgs/cm ²
Power Supply 供電	220V/380V 50/60Hz	220V/380V 50/60Hz
Usable Width 使用寬度	1000mm	1200mm
Length 長度	3680mm	3680mm
Width 寬度	1570mm	1770mm
Height 高度	1150mm	1150mm
Net Weight 淨重	580 kgs	620 kgs
Gross Weight 毛重	800 kgs	860 kgs
Packing Volume 裝箱尺寸	260x175x140 cm	260x195x140 cm



SOLE USA
Distributor:
THE FOX COMPANY

2909 Interstate Street Charlotte, N.C. 28208
704-399-4581 1-800-432-6305(NC)
704-398-1520(FAX) 1-800-438-0167(USA)